



STAUF

seit 1828

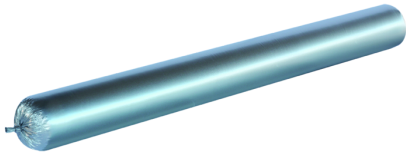

STAUF S PRESS

1-component hard elastic SPU wood flooring adhesive according to ISO 17178



GISCODE
RS 10



Technical Datasheet


Product number	✓ 125200
Special features	<ul style="list-style-type: none">✓ elastic bonding✓ adhesive residues easy to remove✓ solvent-free, no labeling required, water-free✓ no wood swelling
Suitable for installation of	<ul style="list-style-type: none">✓ upright mosaic parquet lamellas, according to DIN EN 14761, from 16 mm thickness✓ solid planks, with relation width/thickness max. 7:1✓ multiple layer wood flooring according to DIN EN 13489✓ mosaic parquet according to DIN EN 13488✓ wood strip flooring raw according to DIN EN 13226, max. 75 x 600 mm, min. 14 mm thickness
Suitable sub floors	<ul style="list-style-type: none">✓ calcium sulphate (flow) floors✓ STAUF levelling compounds for wood flooring✓ chipboards V100 (E1), OSB boards✓ cement floors✓ mastic asphalt screed, only after priming with STAUF VEP 195
Suitable primers	<ul style="list-style-type: none">✓ STAUF VDP 130✓ STAUF VPU 155 S✓ STAUF VEP 195
Suitable levelling compounds	<ul style="list-style-type: none">✓ STAUF XP 40✓ STAUF SSP RAPID
Suitable underlays	<ul style="list-style-type: none">✓ STAUF polyester fleece✓ STAUF Decoupling/stress relief board
Product properties	<ul style="list-style-type: none">✓ aging-resistant✓ elastically deformable✓ not sensitive to frost✓ very well spreadable✓ fast setting
Color	✓ beige

Required quantities per m ²	<ul style="list-style-type: none"> ✓ approx. 1050 g/m² for mosaic parquet ✓ approx. 1300 g/m² for wood strip flooring, upright mosaic parquet lamellas ✓ approx. 1300 g/m² for multiple layer wood flooring
Open time	✓ approx. 30 minutes at 20 °C
Accessibility	✓ after approx. 48 hours
Room climate at work site	✓ minimum 15 °C, maximum 75% rel. humidity, preferably max. 65%
Shelf-life	✓ 12 months
Giscode	✓ RS 10
Ecode	✓ EC1-R
Available Packaging	✓ 1800 ml aluminum bag




EXAMINATION OF SUB FLOOR

Prior to processing, the sub floor must be checked according to the standard DIN 18365 or corresponding national standards (e.g. BS 5325). The sub floor shall be resistant to pressure and tension, free of cracks, must have sufficient surface strength, be permanently dry, level, clean and free of anti-adherents, sinter layers etc. In addition, porosity and grip of surface need to be checked. Also check moisture content and absorptive capacity of cement (flow) and calciumsulfate (flow) floors as well as room temperature, air humidity and sub floor temperature.



SUB FLOOR PREPARATION


It must be ensured that the sub floor is ready for installation by performing proper sub floor preparation, floors must be clean, have sufficient surface strength, must be level, permanently dry and free of cracks. A mechanical pretreatment of the subfloor (sweeping, vacuuming, mechanical brushing, sanding, milling, shot blasting) must be performed depending on type and condition of sub floor. Cracks and joints, except expansion joints and other construction joints, shall be solidly closed with STAUF casting resin and floor brackets. Cavities and indentations can be filled with a non self-levelling STAUF levelling compound. If necessary, make sure sub floors are level, have sufficient absorptive capacity and grip by applying the appropriate STAUF levelling compound.



PROCESSING

Apply the adhesive to the substrate using the applicator machine. Pull the applicator at an even speed in order to keep the layer sufficiently thin and to avoid areas of accumulation. Lay the parquet flooring onto the adhesive layer within the specified laying time. Position the parquet correctly and then press down firmly. In particular with raw wood flooring, avoided pushing adhesive into joints. Adhesive in joints can impair subsequent surface treatment. Depending on the degree of setting, adhesive residues can be removed with the appropriate STAUF cleaners. Please test the effect of the cleaner on the finish of the wood flooring in an inconspicuous area or on a sample prior to applying the cleaner. Hardened adhesive residues can easily be removed mechanically, mostly residue-free. However, longer exposures on finished wood flooring should be avoided to prevent possible contouring.

ACCESSIBILITY




Load bearing capacity depends on room climate and applied quantities of adhesive.



OTHER INFORMATION

Plasticizers contained in the adhesive can cause floor asphalts to partially dissolve and may affect the wood flooring finish systems, especially for wood flooring installed without tongue and groove technique. In case an elastic bonding is desired, please use STAUF adhesives without softening ingredients. The adhesive hardens when reacting with moisture either in the form of air humidity, wood or substrate moisture. The higher the ambient temperature, the faster the adhesive sets. Setting time increases with thickness of the adhesive layer. For installation of wood flooring types without tongue and groove technique, we recommend using only elastic adhesives with some reservations on account of limited dimensional stability. For these types of wood flooring, we recommend using of hard-elastic STAUF polyurethane adhesives (PUK- or SPU-Types) series) or hard-elastic dispersion adhesives (STAUF M2A series). Adhesives classified as elastic according to DIN EN 14293 and ISO 17178, have elastic properties once hardened. On account of this elasticity, only minimal tension is transferred from parquet to sub floor, but dimensional changes of the parquet elements are allowed for.



LIMITATION OF LIABILITY

The foregoing representations are based on the results of our most current product and material testing and are of a non-obligatory advisory nature only since we have no control over the actual quality of workmanship, materials used and worksite conditions. As such, they do not constitute an express or implied warranty of any kind. The same applies to our commercial and technical consultation services which are provided free-of-charge and without obligation. Therefore, we strongly recommend that prior on-site testing be conducted to observe and study the suitability of the product for the intended purpose. With the release of this technical information, all prior technical information (technical data sheets, installation recommendations and other information regarding similar purposes) becomes invalid.

STAUF KLEBSTOFFWERK GMBH . Oberhausener Str. 1 . 57234 Wilnsdorf . Germany
Fon: +49 (0) 2739 301-0 . Fax: +49 (0) 2739 301-200 . Email: info@stauf.de